SESCOM®

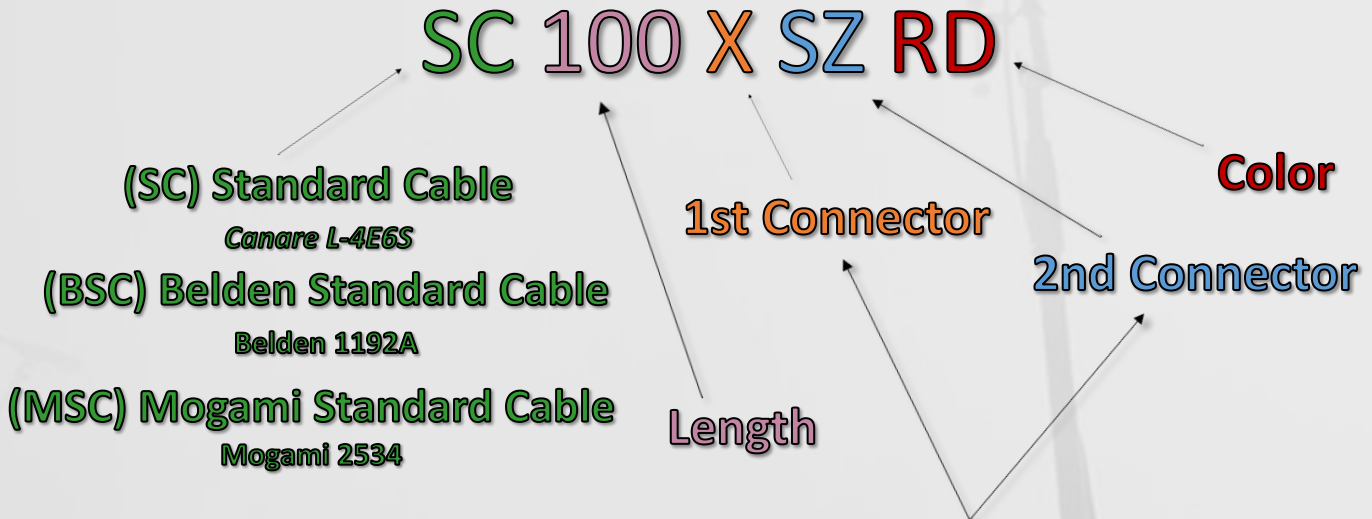# *Sescom Audio Cable Designation*

(TYPE) (LENGTH) (Conn 1) (Conn 2) (Optional Variances)

SC25XXJWE-EMX | SC25XXJPE/B | SC25XX-BAG

SC 100 X SZ RD

(SC) Standard Cable
Canare L-4E6S

(BSC) Belden Standard Cable
Belden 1192A

(MSC) Mogami Standard Cable
Mogami 2534

1st Connector

Color

2nd Connector

Length

S	¼" Phone Plug (male) TS	2 conductor, mono, unbalanced
SJ	¼" Phone Jack (female) TS	2 conductor, mono, unbalanced
SZ	¼" Phone Plug (male) TRS	3 conductor, stereo, balanced
SJZ	¼" Phone Jack (female) TRS	3 conductor, stereo, balanced
R	RCA Male	only 2 conductors, mono, unbalanced
RJ	RCA Female	only 2 conductors, mono, unbalanced
M	3.5mm (⅛") Plug (male) TS	2 conductor, mono, unbalanced
MJ	3.5mm (⅛") Jack (female) TS	2 conductor, mono, unbalanced
MZ	3.5mm (⅛") Plug (male) TRS	3 conductor, stereo, balanced
MJZ	3.5mm (⅛") Plug (female) TRS	3 conductor, stereo, balanced
X	3 pin XLR male	
XJ	3 pin XLR female	
A	Angled	
T3	Tiny (mini) 3-Pin XLR Male	
TJ3	Tiny (mini) 3-Pin XLR Female	
T4	Tiny (mini) 4-Pin XLR Male	
TJ4	Tiny (mini) 4-Pin XLR Female	
D	Digital	

SESCOM®
The Audio Source.